


Premium Military Grade Duct Tape

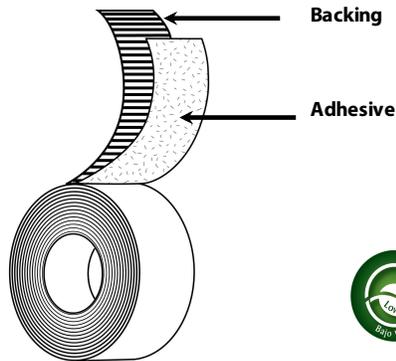

Backing:	PE Coated Cloth
Adhesive:	Rubber
Liner:	N/A
Colors:	Olive Drab, Black
Specifications:	ASTM D -5486 Type IV Class 1 (supercedes PPP-T-60D & E Type IV, Class 1), DPM 871-3 NSN 7510-00-074-4961
Standard Sizes:	48mm x 55m, 72mm x 55m

Applications

- Waterproof packaging for military and aerospace applications
- Media blast protection and surface masking
- Challenging repair, bundling, and seaming applications

Features

- PE-Coated Cloth Backing
- Natural Rubber Based Adhesive

Benefits

- High tensile strength for difficult applications
- Extremely conformable
- Crisp, straight tear
- Moisture, solvent, and abrasion resistant
- Aggressive adhesion to all surfaces

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	12.0 mils	0.305 mm	ASTM D-1000
Adhesion to Steel	95 oz/in	10.39 N/cm	PSTC-101
Adhesion to Backing	40 oz/in	4.38 N/cm	PSTC-101
Tensile Strength	50 lb/in	87.56 N/cm	ASTM D-1000
Elongation	13%		ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
Total Mass Loss	1.61%		ASTM E 595
Collected VCM	<0.01%		ASTM E 595

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.