


# D9200

## FR Waterseal Tape & Corrosion Inhibitor

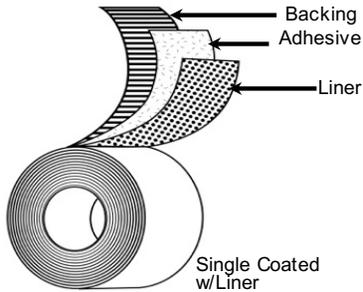

**Backing:** Exterior-Grade Aliphatic Polyurethane

**Adhesive:** FR Acrylic

**Liner:** Blue HDPE

**Colors:** Transparent

**Specifications:** FAR 25.853(a); Fokker Fk05-193

**Size Options:** Incremental sizes 1/4" - 48" x 108Ft

### Applications

- Floor joint sealing on aircraft decking in all wet areas including: entryways, galleys, lavatories, and more
- Anti-slip tape for aircraft overhead bins
- Moisture barrier applications
- Reinforcement and moisture barrier for aircraft insulation fastener openings
- Surface protection for high wear areas

### Features

- Polyurethane Film Backing
- FR Acrylic Adhesive
- Blue HDPE Release Liner

### Benefits

- Protects and holds under heavy usage
- Tough and elastic
- Excellent lay flat and dimensional stability
- Transparent to allow for visual inspection
- Strong permanent bond
- Meets FAA flammability standards
- Compatible with sealants
- Repositionable
- Smooth clean release - easy to use
- Die cuttable

### Typical Test Values

	Standard UOM		Metric UOM		Test Method
<b>Total Thickness</b>	14.0	mils	0.356	mm	PSTC-133
<b>Substrate Thickness</b>	12.0	mils	0.305	mm	PSTC-133
<b>Adhesion to Steel</b>	80	oz/in	8.75	N/cm	ASTM D-3330
<b>Tensile Strength</b>	80	lb/in	140.10	N/cm	ASTM D-3759
<b>Puncture Resistance</b>	40	lbs	18.14	kg	ASTM D-1000
<b>Elongation</b>	500%				
<b>Weight</b>	12.60	oz/yd <sup>2</sup>	427.21	g/m <sup>2</sup>	
<b>Application Temperature</b>	50 °F to 120 °F		10 °C to 49 °C		
<b>Operating Temperature</b>	-40 °F to 275 °F		-40 °C to 135 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F  
Standard Shelf Life (at 25 °C): 24 months from date of manufacture

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.